


## Graph



## Coating Details

BBAR On Fused Silica Optimized for 400nm to 500nm  
Minimum achievable reflectance 0.5% per face, 1% overall

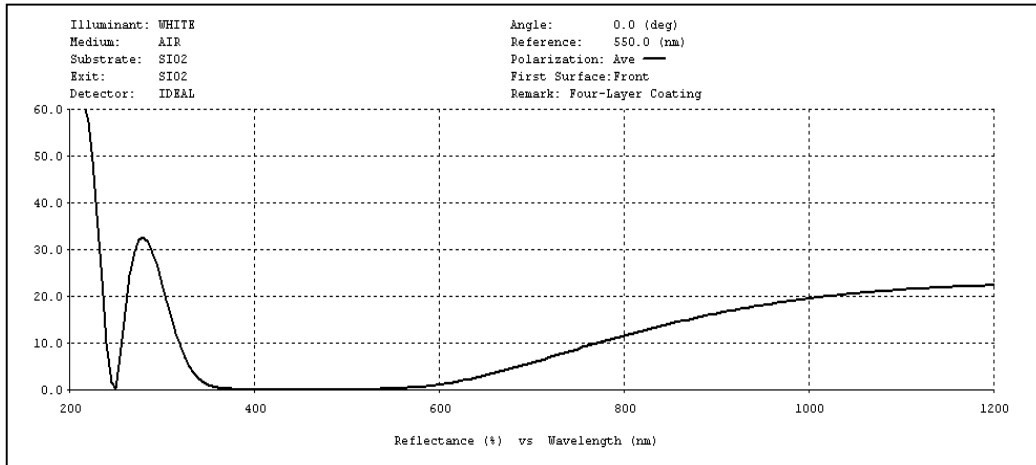