


Graph



Coating Details

BBAR On Fused Silica Optimized for 400nm to 500nm
Minimum achievable reflectance 0.5% per face, 1% overall

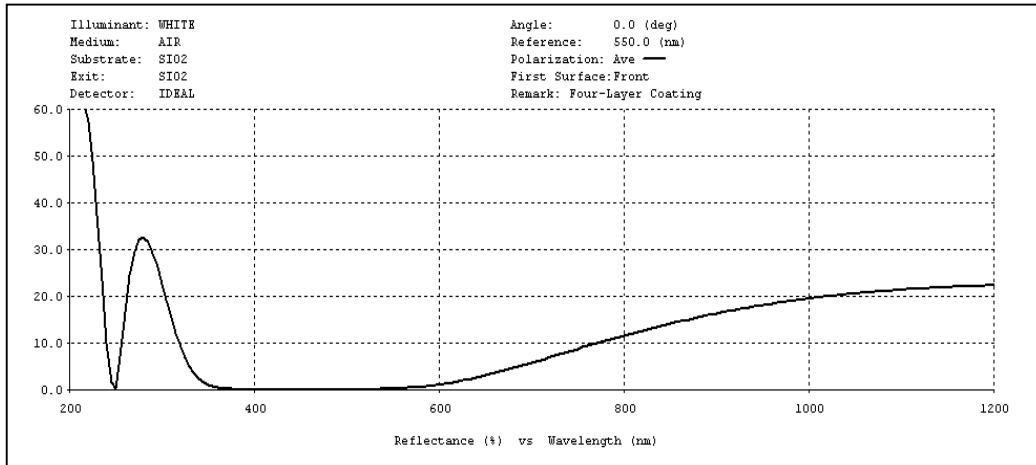