


Graph



Coating Details

Standard BBAR Optimized for 400nm & 600nm
Minimum achievable reflectance 0.5% per face, 1% overall

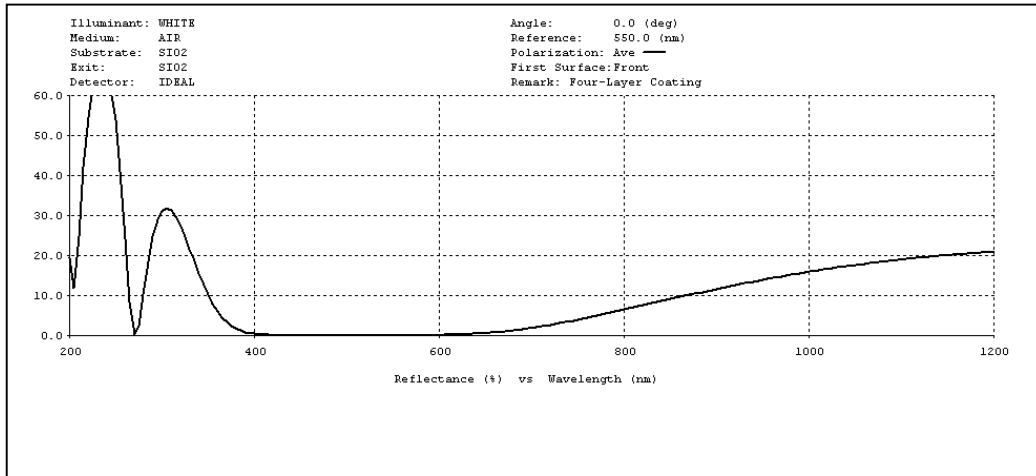