


## Graph

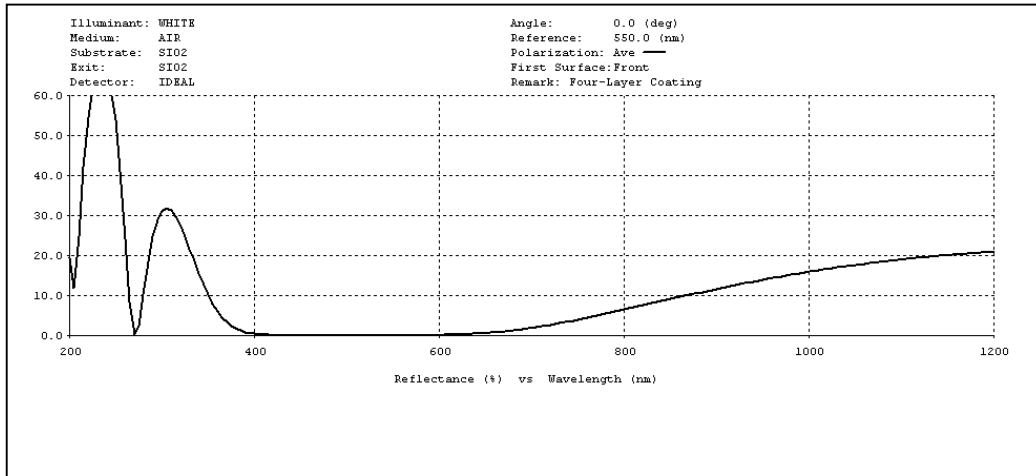

## Coating Details

Standard BBAR Optimized for 401nm & 671nm

401nm = < 1.0%

671nm = < 2.0%

(Note, minimum reflectance is <0.5% per face 1% total)

