


# Graph



## Coating Details

Double Sided BBAR Coating on Fused Silica for 500 to 1000 nm  
Minimum achievable reflectance 0.5% per face, 1% overall

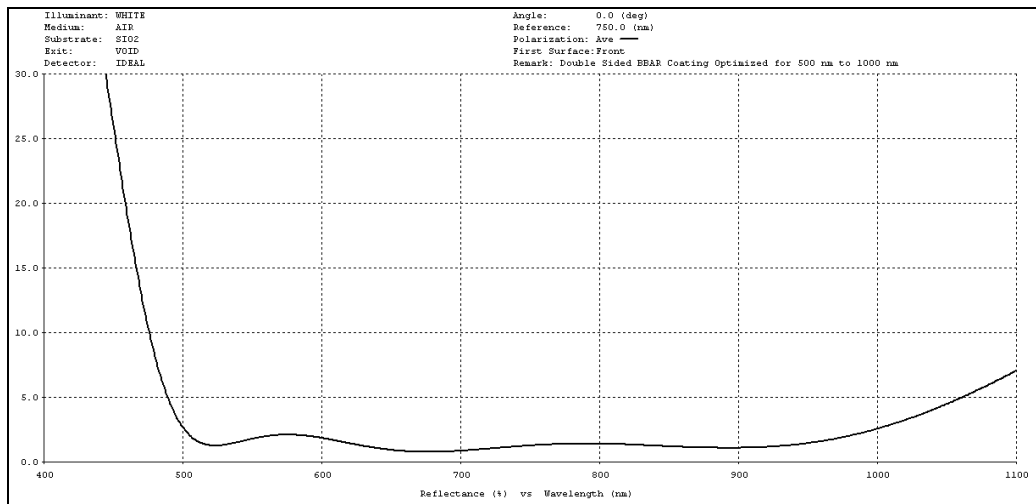