


## Graph



## Coating Details

BBAR Optimised for 550nm to 1100nm on fused silica  
Note, minimum achievable reflectance is <0.5% per face 1% total

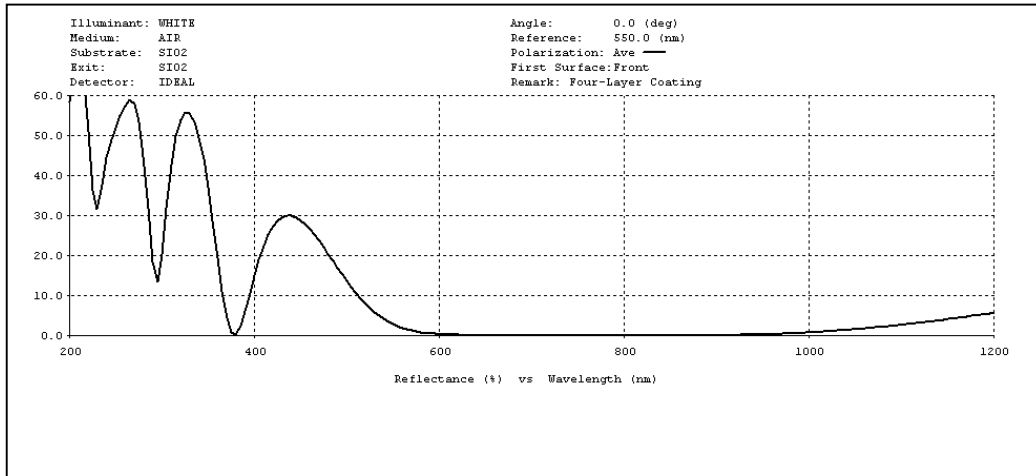