


## Graph



## Coating Details

BBAR Optimized for 800nm – 900nm on SiO2  
Note, minimum achievable reflectance <0.5% per face, 1% total

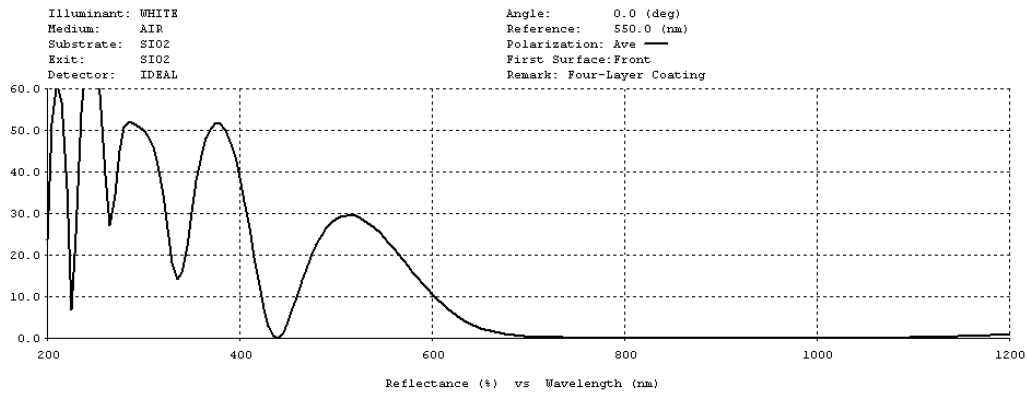