


Graph



Coating Details

BBAR Optimized for 461nm and 689nm On Fused Silica
Note, minimum reflectance achievable <0.5% per face 1% total

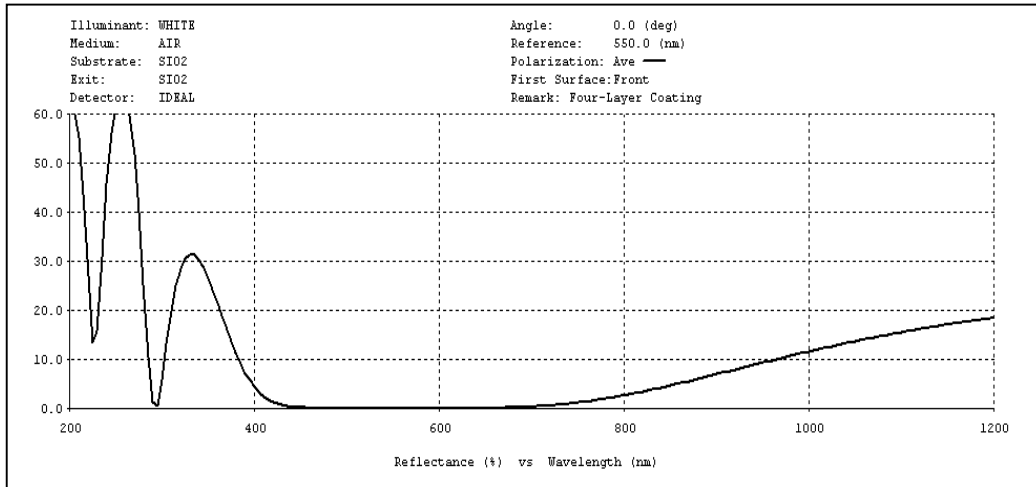